

5	1/2 meter $\phi$ 5	55.33		
4	1/2 meter Fireproof concrete			
3	1 Outside screen of copper and soap			31.75.79
2	1 Central screen			31.75.78
1	1 Screen at the ceiling wall			31.73.77



Nieuw		Bestel	
Com. nr.	Verrengt	Verrengt	Verrengt door
Schaal 1:20			
Vak	Gecont.	Gecont.	Projectie
Dat./Par.	Naam/Id.	Naam/Id.	Naam/Id.
WIJZIGING	Dat.	Dat.	Dat.

DO-11-0070


12.13.02

25 - 20 - 15 - 10  
 2000 - 1500 - 1000 - 500  
 25 - 20 - 15 - 10  
 2000 - 1500 - 1000 - 500  
 25 - 20 - 15 - 10  
 2000 - 1500 - 1000 - 500

REF	QTY	SIZE	ITEM	SCH/RATING	DESCRIPTION
1	1 EA	CUSTOM	EHD	7 GA.	304/304L
2	4 EA	CUSTOM	UPPER SUPPORT TABS	7 GA.	304/304L
3	4 EA	CUSTOM	LOWER SUPPORT TABS	7 GA.	304/304L

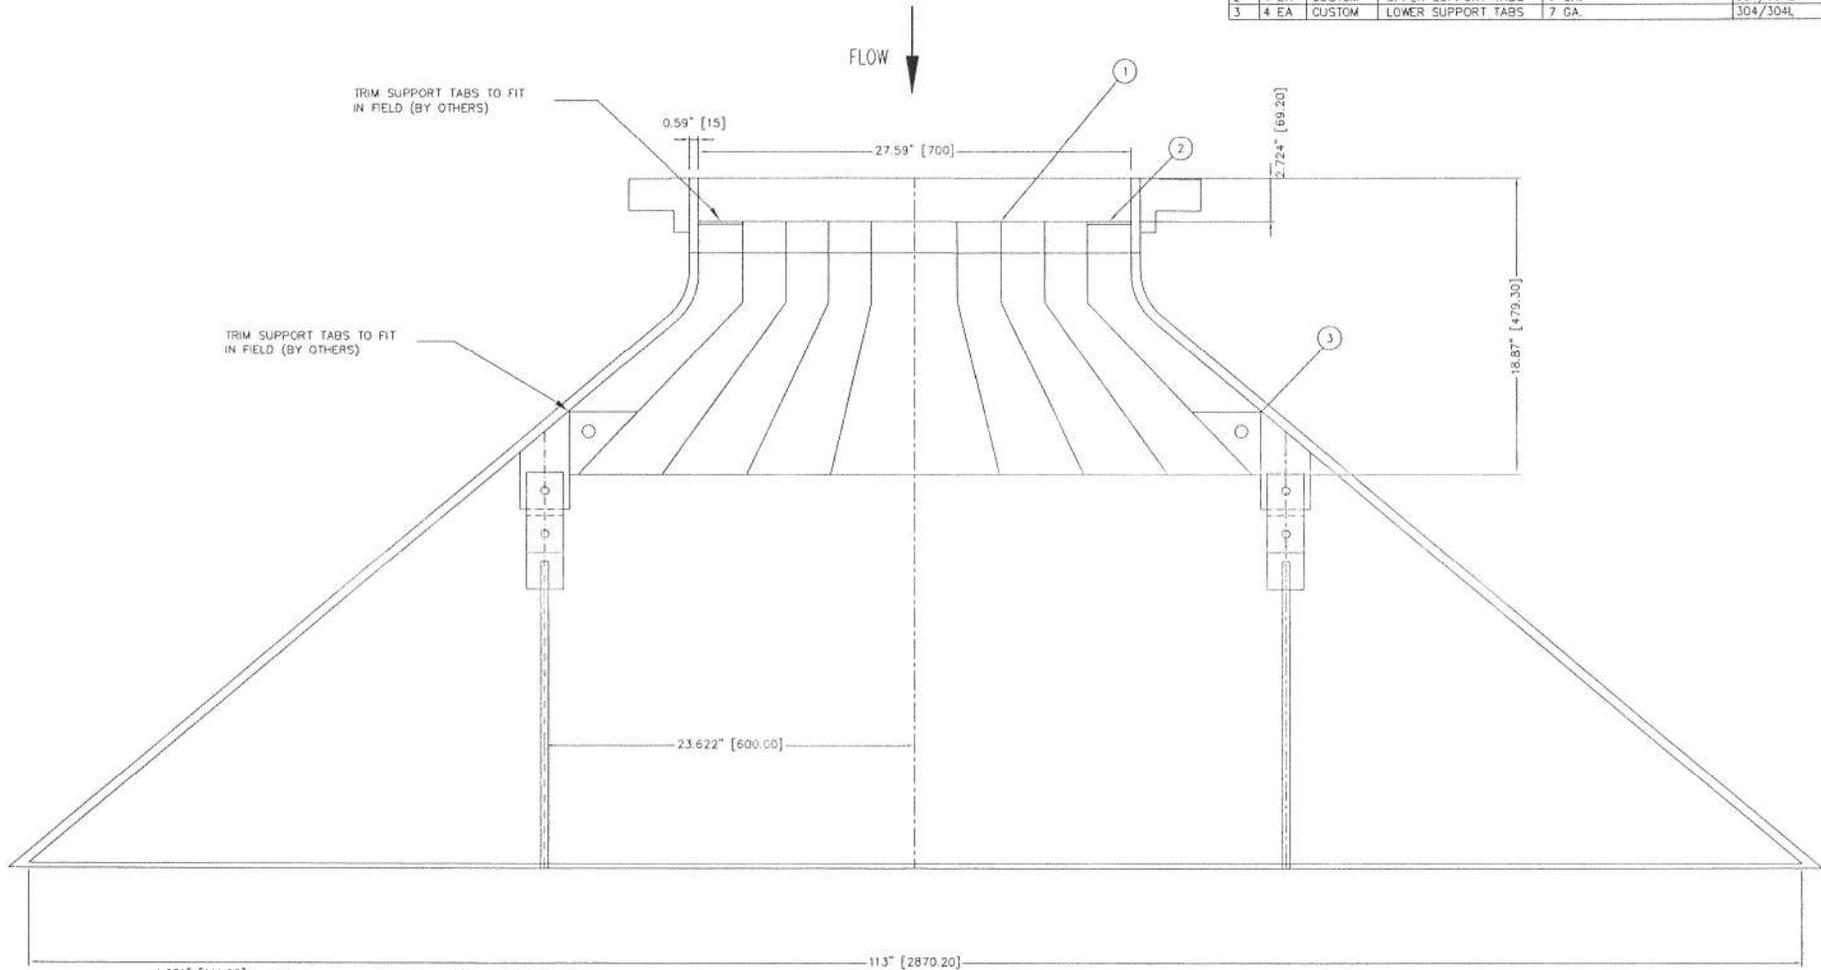

LOWER SUPPORT TAB DETAIL



UPPER SUPPORT TAB DETAIL

NOTES:

- EXISTING EQUIPMENT MUST FIRST BE REMOVED.
- THE EHD IS TO BE MOUNTED BY THE 4 LOWER SUPPORT TABS. THESE TABS WILL BE SUPPLIED WELDED TO THE EHD. THE LOWER SUPPORT TABS ARE TO BE FASTENED TO THE EXISTING SUPPORT TABS USING 3/4\" BOLT.
- THE EXISTING TABS MUST BE TRIMMED AND DRILLED TO ACCOMMODATE THE NEW EHD. MAKE SURE THAT ENOUGH OF THE EXISTING TAB IS LEFT TO BOLT UP TO THE LOWER SUPPORT TABS ON THE EHD. ONE HOLE PER EXISTING TAB MUST BE DRILLED FOR BOLTING.
- THE UPPER SUPPORT TABS ARE USED ONLY TO KEEP THE UPPER PORTION OF THE EHD CENTERED IN THE OPENING.

REVISION:		APPROB: R. SOJO			
B-11-1058		ISSUED FOR APPROVAL		MONOMEROS	
REV.	DATE	CHK.	DATE	REMARKS	APPR. DATE
SULZER		ORDER NO. C032240		STATIC MIXER TYPE EHD	
Dwg. No.		C032240-02		Rev. No. 0	